

CHARACTERISTICS

Innovative and patented system with double sunscreen and sun shading function to shelter from direct sunlight while maintaining a pleasant and modern appearance.

When packed together, Oskura Orizzontale's size is minimised, to free up the view.

Its extruded aluminium retractable slats contain thermal and sound insulating material for ideal comfort.



RETRACTABLE
SLATS



MOTORISED
SYSTEM

OSKURA ORIZZONTALE

SUNSHADE SYSTEM


TECHNICAL DATA SHEET

OSKURA ORIZZONTALE


	OSKURA MOTORISED	OSKURA MANUAL
SLAT DIMENSIONS	172 x 15 mm	172 x 15 mm
MOTOR BOX LOCATION	SIDE - IN LINE WITH THE SLAT PACK - BEHIND THE SLAT PACK	-
THICKNESS OF TRACKS	80 mm	40 mm
HEIGHT OF BOTTOM TRACK	32 mm	20 mm
WEIGHT	13-18 kg/m ²	13-18 kg/m ²
MAXIMUM WIDTH	4000 mm	4000 mm
MAXIMUM HEIGHT	2800 mm	2800 mm
PACKING	RIGHT / LEFT	RIGHT / LEFT
PACK DIMENSIONS	11% excluding motor box	11%
PACKING OF SLATS	EXTERNAL	EXTERNAL
SLIDING	TOP	TOP
WIND RESISTANCE CERTIFICATION EN 13659	CLASS 6	CLASS 6

OPENING MODULE SET UP


PACKING TO THE LEFT




PACKING TO THE RIGHT




PACK DIVIDED ON TWO SIDES



MOTOR BOX LOCATION

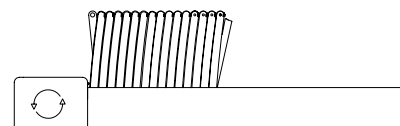

SIDE IN LINE WITH THE SLAT PACK

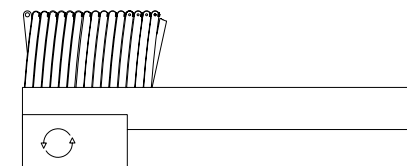

SIDE BEHIND THE SLAT PACK



For finishes, visit the website sunroom.it

The view is always considered to be from the inside.