SUNROOMIII

CHARACTERISTICS

Simple and essential parallel sliding door system with the special modular frame structure that allows an infinite number of types to be built. The multi-channel tracks promote the gathering of all panels next to the first one, allowing a large part of the surface to be opened. The stainless steel accessories ensure stability and durability.







S.50

ALUMINIUM SYSTEM

NUMBER OF TRACKS	2/3/4/5/6
DIMENSIONS OF CENTRAL NODE	52 mm
MAXIMUM PANEL WIDTH	1350 mm
MAXIMUM PANEL HEIGHT	2400 mm
MAXIMUM PANEL WEIGHT	50 kg
WEIGHT OF GLAZED UNIT	5-8 kg/m² excluding glazing
PANEL ADJUSTMENTS	✓
SLIDING	воттом
SLIDING ACCESSORIES	STAINLESS STEEL
HEIGHT OF BOTTOM TRACK	37 mm
RECESSED TRACK	UPON REQUEST
COLOUR OF ACCESSORIES	BLACK
CLOSURES	SIDE ON FRAME
OPENING FROM OUTSIDE WITH A KEY	UPON REQUEST
RIGHT / LEFT SLIDING	✓
SLIDING CORNER TYPE	UPON REQUEST
GLAZING	4/17 mm
WATER TIGHTNESS CERTIFICATION EN 1027 – EN 12208	CLASS 6A
AIR PERMEABILITY CERTIFICATION EN 1026 – EN 12207	CLASS 3
WIND RESISTANCE CERTIFICATION EN 12211 - EN 12210	CLASS A1

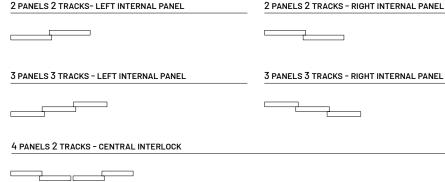

OPENING MODULE SET UP

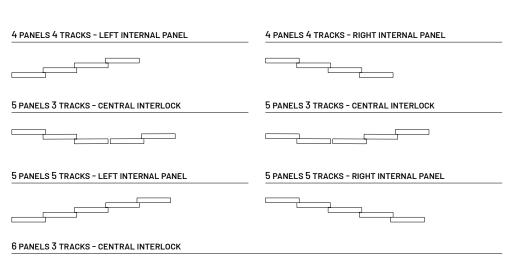



The view is considered to be from the inside. For good operation of the glazed unit, always follow the type indicated.



For finishes, visit the website sunroom.it

