

## CHARACTERISTICS

Innovative and patented system with double sunscreen and sun shading function to shelter from direct sunlight while maintaining a pleasant and modern appearance.

The vertical version of Oskura packs the slats in the top of the frame, to ensure minimum space requirements and maximum visibility of the outdoors. The system is motorised and its extruded aluminium retractable slats contain insulating material.



RETRACTABLE  
SLATS



MOTORISED  
SYSTEM

# OSKURA VERTICALE


SUNSHADE SYSTEM

## OSKURA VERTICALE

|  |   |
|--|---|
| SLAT DIMENSIONS                        | 172x15 mm   |
| MOTOR BOX LOCATION                     | TOP<br>- IN LINE WITH THE SLAT PACK<br>- BEHIND THE SLAT PACK |
| MOTOR BOX SIZE                         | 140x100 mm  |
| THICKNESS OF SIDE JAMBS                | 80 mm   |
| HEIGHT OF BOTTOM TRACK                 | 26 mm   |
| WITHOUT BOTTOM TRACK                   | UPON REQUEST  |
| WEIGHT                                 | 13-18 Kg/m <sup>2</sup>                                       |
| MAXIMUM WIDTH                          | 2700 mm   |
| MAXIMUM HEIGHT                         | 3000 mm   |
| PACKING                                | TOP   |
| PACK DIMENSIONS                        | 11%<br>EXCLUDING MOTOR BOX                                    |
| PACKING OF SLATS                       | EXTERNAL  |
| WIND RESISTANCE CERTIFICATION EN 13659 | CLASS 6   |


## OPENING SET UP

### UPPER PART PACKING




## MOTOR BOX LOCATION

### TOP- IN LINE WITH THE SLAT PACK

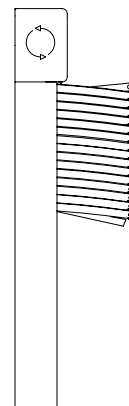

### TOP- BEHIND THE SLAT PACK

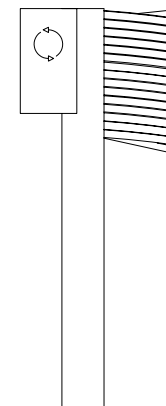

The view is always considered to be from the inside.



For finishes, visit the website [sunroom.it](http://sunroom.it)