SUNROOM!!!

CHARACTERISTICS

Simple and essential parallel sliding door system with the special modular frame structure that allows an infinite number of types to be built. The multi-channel tracks promote the gathering of all panels next to the first one, allowing a large part of the surface to be opened. The stainless steel accessories ensure stability and durability.






S.50

ALUMINIUM SYSTEM

NUMBER OF TRACKS	2/3/4/5/6
DIMENSIONS OF CENTRAL NODE	52 mm
MAXIMUM PANEL WIDTH	1350 mm
MAXIMUM PANEL HEIGHT	2400 mm
MAXIMUM PANEL WEIGHT	50 kg
WEIGHT OF GLAZED UNIT	5-8 kg/m² excluding glazing
PANEL ADJUSTMENTS	✓
SLIDING	воттом
SLIDING ACCESSORIES	STAINLESS STEEL
HEIGHT OF BOTTOM TRACK	37 mm
RECESSED TRACK	UPON REQUEST
COLOUR OF ACCESSORIES	BLACK
CLOSURES	SIDE ON FRAME
OPENING FROM OUTSIDE WITH A KEY	UPON REQUEST
RIGHT / LEFT SLIDING	✓
SLIDING CORNER TYPE	UPON REQUEST
GLAZING	4/17 mm
WATER TIGHTNESS CERTIFICATION EN 1027 - EN 12208	CLASS 6A
AIR PERMEABILITY CERTIFICATION EN 1026 - EN 12207	CLASS 3
WIND RESISTANCE CERTIFICATION EN 12211 - EN 12210	CLASS A1



OPENING MODULE SET UP

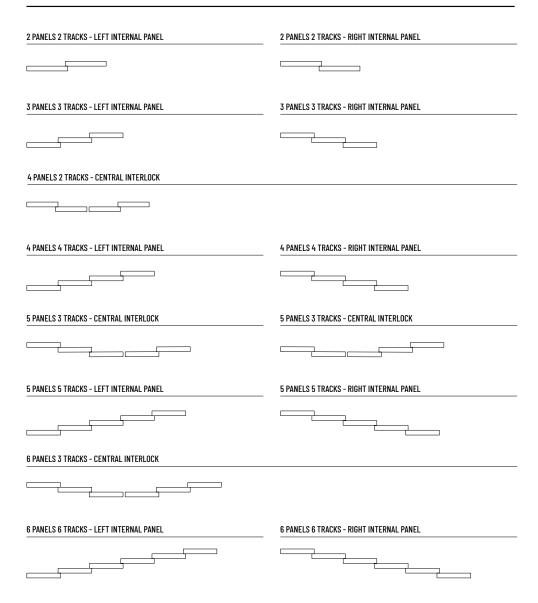

The view is considered to be from the inside. For good operation of the glazed unit, always follow the type indicated.

