

## CHARACTERISTICS

Thermal break aluminium system for conservatories that combines design with living comfort.

The glass roof can be opened for two-thirds of its surface with the advantage of a motorised and extremely quiet opening system.



ROOF THAT  
OPENS



THERMAL  
BREAK



MOTORISED  
SYSTEM

# MOTUS TT

CONSERVATORY


# MOTUS TT

## THERMAL BREAK SYSTEM



MAXIMUM DEPTH	6000 mm
OVERALL WEIGHT EXCLUDING GLASS	15 kg/m <sup>2</sup>
PRIMARY ALLOY STRUCTURE UNI EN 6060 AND UNI EN 6063 (EXTRUDED ALUMINIUM)	✓
POST PROFILE	120 x 80 mm
RAFTER PROFILE	118 x 140 mm
GUTTER PROFILE	256 x 210 mm
THICKNESS OF GLAZING	16 mm   24 mm
PANELS OPEN BACKWARDS	2/3
PANEL MOVEMENT	MOTORISED
MOVEMENT GEAR POSITION	INTERNAL / EXTERNAL
CERTIFICATION OF THE STRUCTURE EN 1090-1:2009/A 1:2011	✓
AIR PERMEABILITY CERTIFICATION UNI EN 12207	✓
WATER TIGHTNESS CERTIFICATION UNI EN 12208	✓
WIND RESISTANCE CERTIFICATION - UNI EN 12210	✓
GLASS SYSTEMS	UPON REQUEST
CLIMATIC SENSORS (WIND, RAIN)	UPON REQUEST

# SLIDING ROOF MODULES

## 3 PANELS FRONT TO REAR

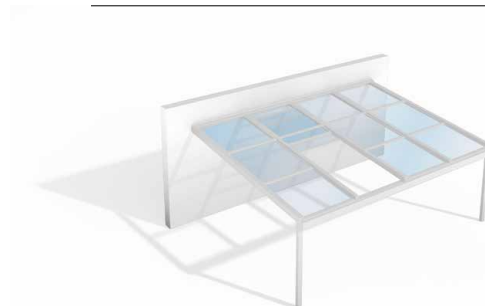

## 2 PANELS FRONT TO REAR

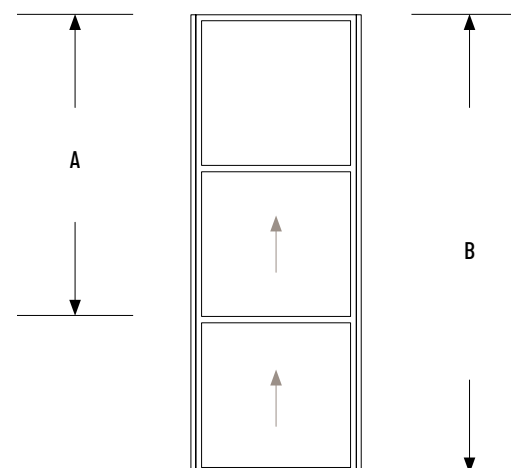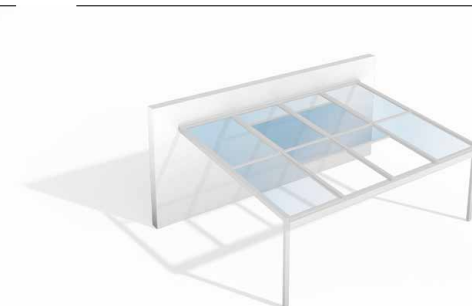

## OPENING SYSTEM

- A 2 PANELS UP TO 3500 mm
- B 3 PANELS UP TO 6000 mm



For finishes, visit the website [sunroom.it](http://sunroom.it)