

CHARACTERISTICS

Innovative and patented system with double sunscreen and sun shading function to shelter from direct sunlight while maintaining a pleasant and modern appearance.

The vertical version of Oskura packs the slats in the top of the frame, to ensure minimum space requirements and maximum visibility of the outdoors. The system is motorised and its extruded aluminium retractable slats contain insulating material.



RETRACTABLE
SLATS



MOTORISED
SYSTEM

OSKURA VERTICALE


SUNSHADE SYSTEM

OSKURA VERTICALE


SLAT DIMENSIONS	172 x 15 mm
MOTOR BOX LOCATION	TOP - IN LINE WITH THE SLAT PACK - BEHIND THE SLAT PACK
THICKNESS OF SIDE JAMBS	80 mm
HEIGHT OF BOTTOM TRACK	26 mm
WITHOUT BOTTOM TRACK	UPON REQUEST
WEIGHT	13-18 kg/m ²
MAXIMUM WIDTH	2700 mm
MAXIMUM HEIGHT	3000 mm
PACKING	TOP
PACK DIMENSIONS	11% excluding motor box
PACKING OF SLATS	EXTERNAL
WIND RESISTANCE CERTIFICATION EN 13659	CLASS 6

OPENING SET UP


UPPER PART PACKING



MOTOR BOX LOCATION

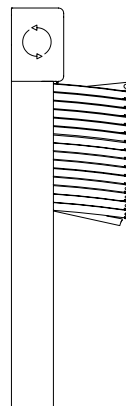

TOP- IN LINE WITH THE SLAT PACK

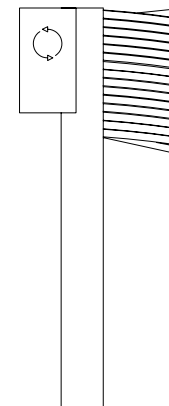

TOP- BEHIND THE SLAT PACK



For finishes, visit the website sunroom.it

The view is always considered to be from the inside.