

CHARACTERISTICS

It is the exclusive bioclimatic pergola with swivel slats that offers maximum comfort and versatility so you can enjoy the luxury of living in nature. If you want a building that blends into the natural context, Oskura Orienta is perfect because its intelligent architecture creates an oasis in nature and redefines the space to provide well-being and comfort in any season.



SWIVEL
SLATS



LED LIGHTING
AVAILABLE

OSKURA ORIENTA

BIOCLIMATIC PERGOLA

OSKURA ORIENTA

OSKURA ORIENTA

MAXIMUM WIDTH	4200 mm
MAXIMUM DEPTH	6219 mm
PERGOLA OVERALL WEIGHT	30 Kg/m ²
PRIMARY ALLOY STRUCTURE EN 6060 AND EN 6063 (EXTRUDED ALUMINIUM)	✓
INSULATED SLATS	✓
SLAT PITCH	199 mm
SLAT THICKNESS	38 mm
POST PROFILE	150x150 mm
GUTTER PROFILE	150x250 mm
SLAT ORIENTATION	0 - 115°
MOTOR OPERATION	✓
CERTIFICATION OF THE STRUCTURE EN 1090-1:2009/A1:2011	✓
CERTIFIED WIND RESISTANCE UNI EN 13659	CLASSE 6 (GRADE 10 ON BEAUFORT SCALE)
WATER TIGHTNESS CERTIFICATION UNI EN 12208:2000	✓
GLASS SYSTEMS	UPON REQUEST
LED LIGHTING	UPON REQUEST
CLIMATIC SENSORS (WIND, RAIN, SUN, TEMPERATURE...)	UPON REQUEST

STANDARD SET UP



FREESTANDING PERGOLA



PERGOLA FITTED TO A WALL

SPECIAL SET UP



INSTALLATION 1

Combined modules on both sides (width and depth).




INSTALLATION 2

Combined modules in different depths, in a freestanding structure.



INSTALLATION 3

Combined modules in different depths, fitted to a wall.



INSTALLATION 4

Combined modules in different widths, in a freestanding structure.




INSTALLATION 5

Combined modules in different widths, fitted to a wall.



INSTALLATION 6

Module with cantilever structure. Maximum 1 meter.

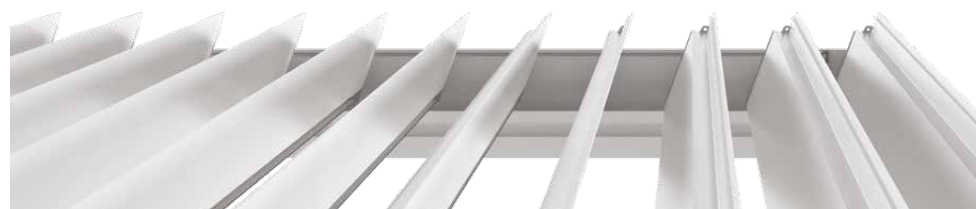

For finishes, visit the website sunroom.it