

## CHARACTERISTICS

Puro TT is the thermal break aluminium system for building conservatories.

Its insulated profiles ensure maximum thermal and acoustic comfort, while the modular structure offers broad design freedom.

LED spotlights may be inserted in the beams upon request.



FLAT  
ROOF



THERMAL  
BREAK



LED  
LIGHTING

# PURO TT

CONSERVATORY


# PURO TT

## THERMAL BREAK SYSTEM


MAXIMUM DEPTH	6000 mm
OVERALL WEIGHT EXCLUDING GLASS	15 Kg/m <sup>2</sup>
PRIMARY ALLOY STRUCTURE EN 6060 AND EN 6063 (EXTRUDED ALUMINIUM)	✓
ANGLE POST PROFILE	209x209 mm
GUTTER PROFILE	154x340 mm
THICKNESS OF GLAZING	30 mm 48 mm
CERTIFICATION OF THE STRUCTURE EN 1090-1:2009/A1:2011	✓
AIR PERMEABILITY CERTIFICATION UNI EN 12207	✓
WIND RESISTANCE CERTIFICATION UNI EN 12210	✓
WATER TIGHTNESS CERTIFICATION UNI EN 12208	✓
GLASS SYSTEMS	UPON REQUEST
LED LIGHTING	UPON REQUEST
MOTORISED DORMER	UPON REQUEST
CLIMATIC SENSORS	UPON REQUEST

# STANDARD SET UP

## SELF-SUPPORTING STRUCTURE



## STRUCTURE FITTED TO A WALL



# SPECIAL SET UP

## INSTALLATION 1




## INSTALLATION 2




## INSTALLATION 3



## INSTALLATION 4



## INSERTION OF THE SUNSHADE SYSTEM

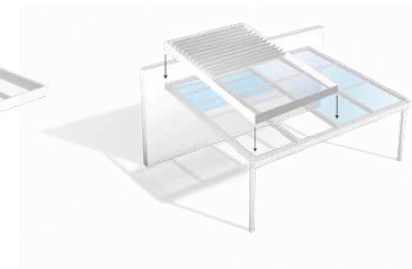

## INSERTION OF A SKYLIGHT



For finishes, visit the website [sunroom.it](http://sunroom.it)