

CHARACTERISTICS

The primary advantages of the Tuttovetro frameless system in its collapsible version are related to the aesthetics with zero impact on the overall architecture and the possibility to collapse into a pack to create a minimum footprint. The stainless steel accessories ensure stability and durability.



MINIMUM
FOOTPRINT



INOX
STAINLESS
STEEL

TUTTOVETRO


COLLAPSIBLE FRAMELESS SYSTEM

TUTTOVETRO FRAMELESS

ALUMINIUM SYSTEM

UPPER TRACK PROFILE THICKNESS	55 mm
MAXIMUM PANEL WIDTH	900 mm
MAXIMUM PANEL HEIGHT	3000 mm
MAXIMUM PANEL WEIGHT	60 kg
WEIGHT OF GLAZED UNIT	30+5 kg/m ² INCLUDING GLAZING 12 mm 25+5 kg/m ² INCLUDING GLAZING 10 mm 20+5 kg/m ² INCLUDING GLAZING 8 mm
PANEL ADJUSTMENTS	✓
GASKETS	UPON REQUEST
HEIGHT OF BOTTOM TRACK	42 mm
RECESSED TRACK	UPON REQUEST
SLIDING	TOP
COLOUR OF ACCESSORIES	SILVER
CLOSURES	TOP AND BOTTOM
OPENING FROM OUTSIDE WITH A KEY	UPON REQUEST
HINGED PANEL LOCK	1 POINT (UPON REQUEST)
RIGHT / LEFT PACKING	✓
INWARD / OUTWARD OPENING	✓
SLIDING CORNER TYPE	UPON REQUEST
TYPE WITH SECTORS FOR CURVES	UPON REQUEST
GATHERED GLAZED UNIT DIMENSIONS	7%
GLAZING	8 mm 10 mm 12 mm
AIR PERMEABILITY CERTIFICATION EN 1026 - EN 12207	CLASS 2

OPENING MODULE SET UP

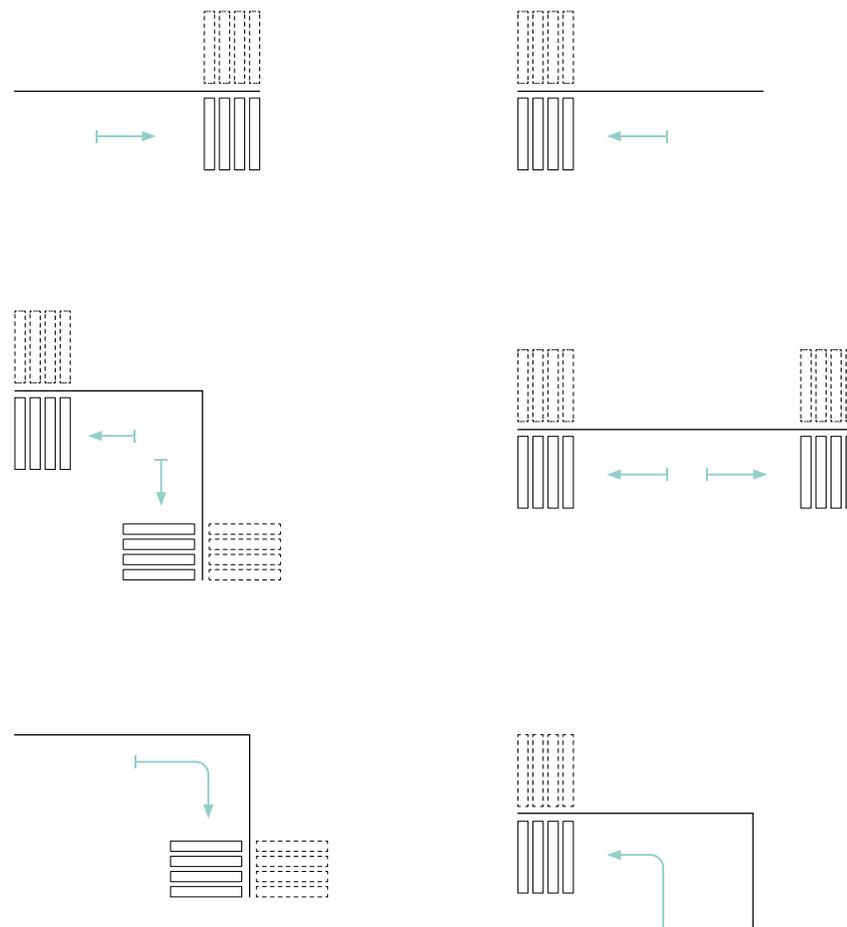

INWARD OPENING

OUTWARD OPENING



For finishes, visit the website sunroom.it