

## CHARACTERISTICS

---

Completely clear collapsible system fitted with a lower roller. A made-to-measure, practical and high-performance glazed unit, ideal for closing off balconies or pergolas, without giving up the view. The possibility of collapsing the panels reduces the structure's footprint to a minimum.



MINIMUM  
FOOTPRINT



BOTTOM  
RUNNING

# TUTTOVETRO FLOOR


COLLAPSIBLE FRAMELESS SYSTEM

# TUTTOVETRO FLOOR FRAMELESS

## ALUMINIUM SYSTEM

|  |   |
|--|---|
| UPPER TRACK PROFILE THICKNESS                        | 66 mm   |
| MAXIMUM PANEL WIDTH                                  | 900 mm  |
| MAXIMUM PANEL HEIGHT                                 | 3000 mm   |
| MAXIMUM PANEL WEIGHT                                 | 60 kg   |
| WEIGHT OF GLAZED UNIT                                | 25+5 kg/m <sup>2</sup> INCLUDING GLAZING 10 mm<br>20+5 kg/m <sup>2</sup> INCLUDING GLAZING 8 mm |
| PANEL ADJUSTMENTS                                    | ✓   |
| GASKETS  | UPON REQUEST  |
| HEIGHT OF BOTTOM TRACK                               | 21 mm   |
| RECESSED TRACK                                       | UPON REQUEST  |
| SLIDING  | LOWER   |
| COLOUR OF ACCESSORIES                                | SILVER  |
| CLOSURES   | TOP AND BOTTOM  |
| OPENING FROM OUTSIDE WITH A KEY                      | UPON REQUEST  |
| HINGED PANEL LOCK                                    | 1 POINT<br>(UPON REQUEST)   |
| RIGHT / LEFT PACKING                                 | ✓   |
| INWARD / OUTWARD OPENING                             | ✓   |
| GATHERED GLAZED UNIT DIMENSIONS                      | 9%  |
| GLAZING  | 8 mm<br>10 mm   |
| AIR PERMEABILITY CERTIFICATION<br>EN 1026 - EN 12207 | CLASS 2   |

# OPENING MODULE SET UP

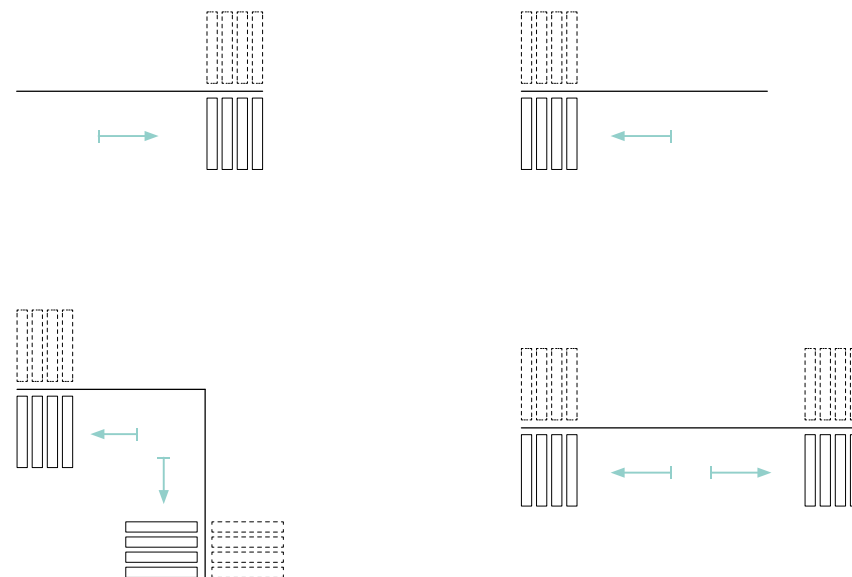

—————  
INWARD OPENING

-----  
OUTWARD OPENING



For finishes, visit the website [sunroom.it](http://sunroom.it)